



- Ecological: tannin-based;
- Passivator: adheres to the sides of the surfaces to be treated, creating a thin protective film that prevents the corrosion reaction;
- Anti-corrosion inhibitor;
- Restorer: removes impurities and sludge. Contributes to reducing bacterial proliferation in heating systems;
- Prevents noise in the boiler, the formation of hydrogen, corrosion and limescale deposits;
- Effective on all metals and compatible with any kind of plastic and rubber commonly used in heating systems;
- Guarantees maximum efficiency of the system;
- Neutral pH: ensures safe use of the product.

PRODUCTION RANGE

Code	Dosage	Supply
3609.00.02	1 kg every 100 l of water	1 kg can

COMPOSITION:

Tetrasodium ethylenediaminetetraacetate.

DESCRIPTION:

Untreated heating circuits can, in the long run, be clogged by sludge deposited in the system and altered by the presence of gas.

Tree Clean, thanks to its complexing and dispersing properties, breaks up this sludge and, by forming a film, prevents its reappearance and the formation of electrochemical cells.

Tree Clean is an effective product on all metals. It is compatible with any kind of plastic and rubber commonly used in heating systems.

Its formulation based on natural polymers respects the environment.

The product can be left permanently in the system, drained and rinsed at a later stage.


After use, it is not necessary to treat the system, since *Tree Clean* already contains a corrosion inhibitor.

CHEMICAL / PHYSICAL PROPERTIES:

- Physical state: liquid
- Colour: brown
- pH (concentrated): 8.2 ±0.5 (20°C)
- Freezing point: - 6°C
- Flammability (solids, gas): non-flammable
- Relative density: 1.11 ±0.02 (20°C)

FIELD OF APPLICATION:

Tree Clean helps to protect the heating system from the main phenomena that cause inefficiency and deterioration, such as:

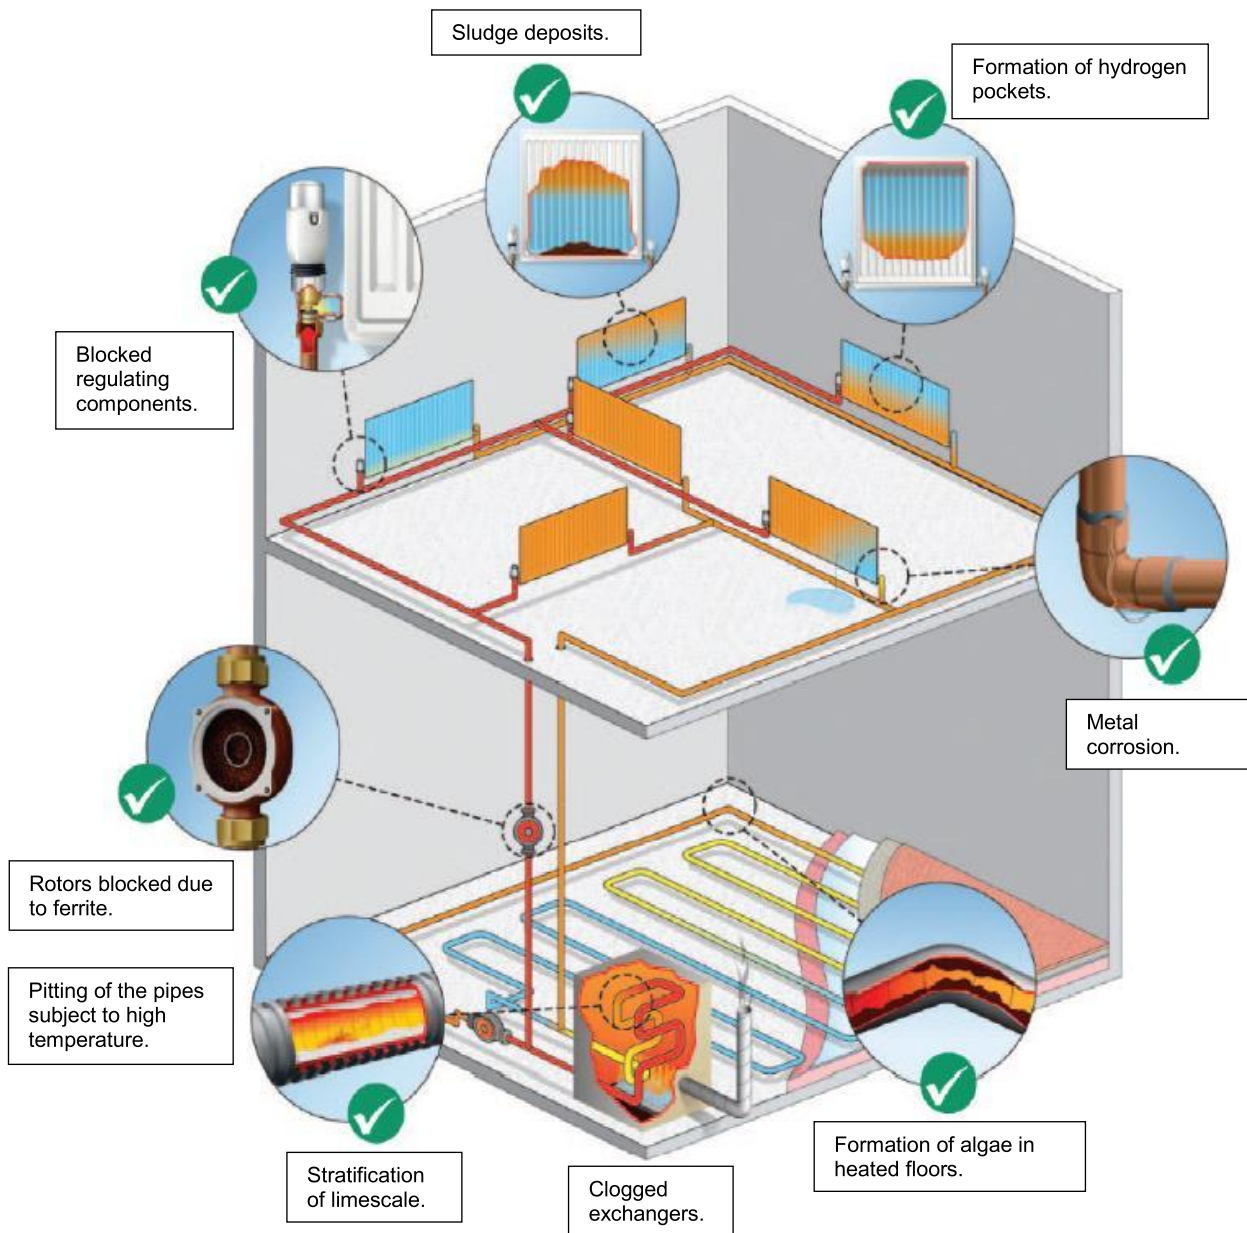

RECOMMENDATIONS:

Do not use for functions other than the purpose for which the product is intended. Only store in the original container and protected from heat in a cool, dry and well-ventilated place. Keep the container tightly closed.

H319 - Causes serious eye irritation.

P264 - Wash hands thoroughly after handling.

P280 - Wear protective gloves/protective clothing/eye protection/face protection.

P305+P351+P338 - IN CASE OF CONTACT WITH EYES: rinse thoroughly with water for several minutes. Remove contact lenses if present and easy to do. Continue rinsing. P337+P313 - If eye irritation persists: seek medical advice.

For further information, please refer to the product *safety data sheet*.



RBM spa reserves the right to improve and change the described products and relative technical data at any moment and without prior notice: always refer to the instructions attached with the supplied components; this sheet is an aid, should the instructions be extremely schematic. Our technical department is always at your disposal for any doubt, problem or clarification.

Rbm
RBM Spa
Via S. Giuseppe, 1
25075 Nave (Brescia) Italy
Tel. 030-2937211 Fax 030-2931798
E-mail: info@rbm.eu - www.rbm.eu